


Carpet Coverstrip

Screws Included 



RT2509A
RT2527A
RT2509G
RT2527G

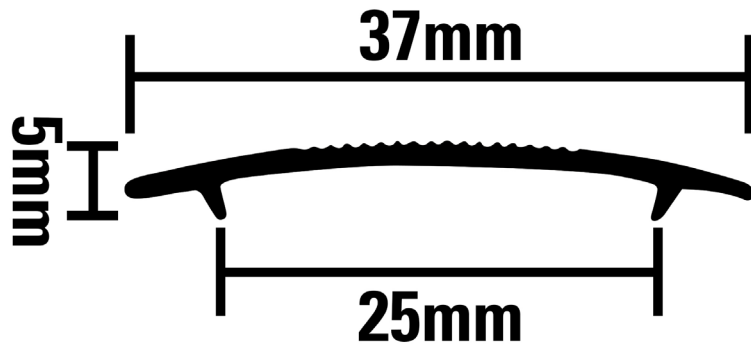

FINISHES



PRODUCT DESCRIPTION

The Carpet Coverstrip is designed for use when two different carpet floorings meet to create a neat finish along the edge.

These bars are ideal for protecting the edges of carpets in doorways. These coverstrips are designed to bite into the pile of the carpet and keep them held in place.

DIMENSIONS

This doorbar is 37mm wide, 5mm tall and comes in either 0.9m and 2.7m lengths. The entire doorbar is visible once installed.

MAINTENANCE

Roberts Doorbars are easy to maintain, requiring no special materials to clean. Aluminium can be corroded by alkaline substances so alkaline cleaner materials should be avoided and quickly removed if contact is made. Cement and cement-based substances become alkaline in contact with water. It is important to correctly seal the area surrounding the door bar to prevent water pooling.

The aluminium finishes will oxidise over time. A polishing agent can be used remove it.

The gold finish is susceptible to scratching and may be damaged by mortar, tile adhesive and grout. It can only be repaired by reapplying the anodising and aluminium will require testing to see if it can sustain the process. It is best to remove setting material immediately with a non-abrasive cleaner.

INSTALLATION

1. Measure the length of the carpet edge/doorway and cut the profile to match.
2. Fit the carpets to the rest of the room. For best results, use carpet grippers, tuckers power stretchers and knee kickers to stretch and fit the carpet. This will prevent wrinkles over time.
3. Stretch the carpets over to the doorbar. Ensure the edges of carpet are within 20mm of each other.
4. Position the doorbar and mark the subfloor. Make sure the screw down points are marked clearly.
5. Remove the profile. Drill into the substrate and insert the appropriate fixings.
6. Screw the doorbar down using appropriate screws ensuring both carpet edges are under the coverstrip.