


9mm Z Edge



RT3009A
RT3027A
RT3009G
RT3027G

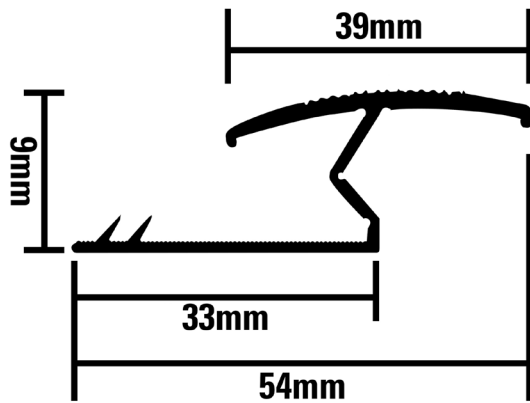

FINISHES



PRODUCT DESCRIPTION

The 9mm Z Edge doorbar is designed for use when two different floorings meet to create a neat finish along the edge.

The nap lock system keeps the carpet stretched and in place to prevent damage and the angled top face protects the edges and of wood and laminate flooring.

DIMENSIONS

This doorbar is 54mm wide, 9mm tall and comes in either 0.9m and 2.7m lengths. The visible surface is 39mm wide.

MAINTENANCE

Roberts Doorbars are easy to maintain, requiring no special materials to clean. Aluminium can be corroded by alkaline substances so alkaline cleaner materials should be avoided and quickly removed if contact is made. Cement and cement-based substances become alkaline in contact with water. It is important to correctly seal the area surrounding the door bar to prevent water pooling.

The aluminium finishes will oxidise over time. A polishing agent can be used remove it.

The gold finish is susceptible to scratching and may be damaged by mortar, tile adhesive and grout. It can only be repaired by reapplying the anodising and aluminium will require testing to see if it can sustain the process. It is best to remove setting material immediately with a non-abrasive cleaner.

INSTALLATION

1. Measure the length of the carpet edge/doorway and cut the profile to match.
2. Install the wood or laminate flooring as directed.
3. Position the doorbar and mark the subfloor. Make sure the screw down points are marked clearly.
4. Remove the profile. Drill into the substrate and insert the appropriate fixings.
5. Screw the door bar down using appropriate screws.
6. Fit the carpet. For best results, use carpet grippers, tuckers, power stretchers and knee kickers to stretch the carpet. This will prevent wrinkles.
7. Stretch the carpets over to the door bar and press the nap into the grips using a carpet tucker. Ensure the edge of carpet is under the overhang.