
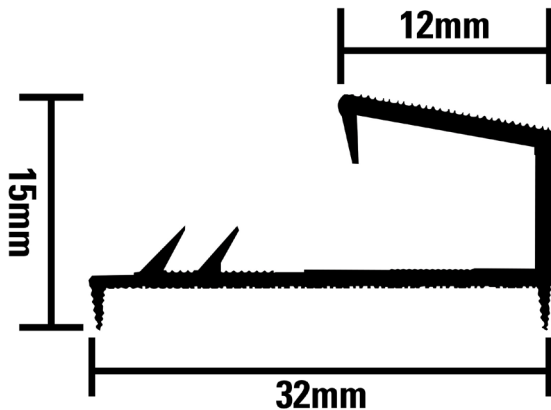


Carpet Square Edge

RT3427A

FINISHES

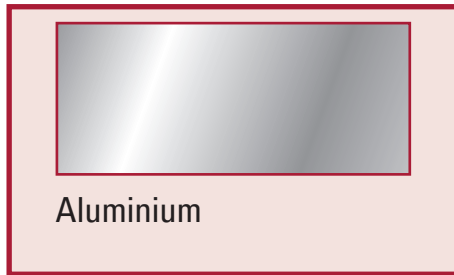

PRODUCT DESCRIPTION

The Carpet Square Edge doorbar is designed for protecting the edges of carpets.

Ideal for near fireplaces and similar areas. Provides a textured surface to prevent slipping.

The nap lock system keeps the carpet stretched and in place to prevent damage.

DIMENSIONS

This doorbar is 32mm wide, 15mm tall and comes in 2.7m lengths. The visible surface is 12mm wide.

MAINTENANCE

Roberts Doorbars are easy to maintain, requiring no special materials to clean.

Aluminium can be corroded by alkaline substances so alkaline cleaner materials should be avoided and quickly removed if contact is made.

Cement and cement-based substances, such as some grouts, become alkaline in contact with water. It is important to correctly seal the area surrounding the doorbar to prevent water pooling and damaging both the substrate and doorbar. Moisture resistant underlay is recommended if compatible with flooring.

The aluminium finishes will oxidise over time. A polishing agent can be used remove it however it will oxidise again. Aluminium oxide results in a duller finish but is protective.

INSTALLATION

1. Measure the length of the carpet edge/doorway and cut the profile to match.
2. Position the doorbar and mark the subfloor. Make sure the screw down points are marked clearly.
3. Remove the profile. Drill into the substrate and insert the appropriate fixings.
4. Screw the door bar down using appropriate screws.
5. Fit the carpeting to the rest of the room. For best results, use carpet grippers, tuckers power stretchers and knee kickers to stretch and fit the carpet. This will prevent wrinkles over time.
6. Stretch the carpet over to the doorbar and press the nap of the carpet into the grips using a Roberts carpet tucker. Ensure the edge of carpet is under the overhang.